# CARBO-MIZER<sub>®</sub> 450


HIGH CAPACITY BULK CO,

# Bulk CO<sub>2</sub> Systems



• FAST FOOD • CONVENIENCE STORES • RESTAURANTS • BARS



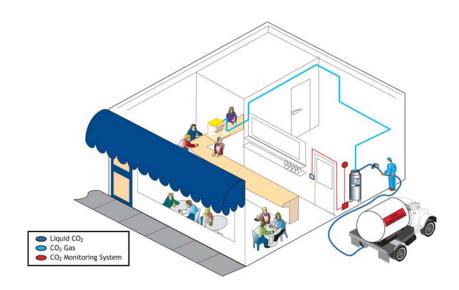

### Carbo-Mizer® 450


The Carbo-Mizer 450 bulk  ${\rm CO_2}$  system is an affordable alternative to high-pressure cylinders. This system offers flow rates that meet the demands of high-volume applications.

Each Chart Carbo Series vessel is equipped with a proprietary vacuum maintenance system to ensure optimized long-term performance. Unique to the market, this feature offers greater efficiency over longer periods of time.



# CARBO-MIZER® 450

HIGH CAPACITY BULK CO.

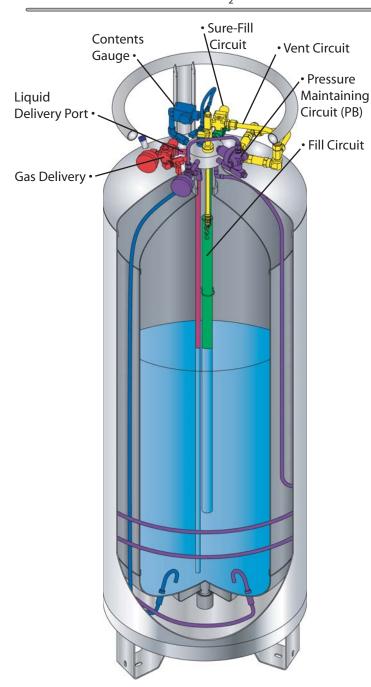

- ¤ Height without legs, subtract 6 in
- \* ASME Boiler and Pressure Vessel Design Section VIII, Div. I
- † Super Insulation/High Vacuum
- § No loss in normal applications
- <sup>®</sup> 12 consecutive hours at room temperature
- ‡ Four consecutive hours at room temperature
- Float gauge available upon request

# **Product Advantages:**

- Proprietary vacuum regeneration system for convenient, on-site maintenance
- Safe, low operating pressure
- Easy-to-read gauges for contents and tank pressure
- Efficient gas withdrawal system supplies CO<sub>2</sub> gas up to 10 pounds per hour (4.5 kg)
- Fully automated system requiring no electricity
- Optional 6" (15.2 cm) welded uni-body legs
- Optional collection ring ensures quality CO<sub>2</sub> gas delivery

# **SPECIFICATIONS**

im		

Diameter	20 in	50.8 cm
Height (with legs)¤	71.875 in	162.6 cm
Empty Weight	273 lb	123.8 kg
Full Weight	750 lb	340.2 kg

#### Design criteria

ASME*

MAWP 300 psig 20.7 bar

Insulation Type SI †

#### Capacity

Gross Volume 52 gal 196.8 ltr Net Storage Volume 48 gal 182 ltr Storage Capacity at 125 psig 477 lb 216.4 kg

## Performance

Evaporation Rate § 2.5 lb/day 1.1 kg/day CO<sub>2</sub> Gas Delivery (Continuous)<sup>®</sup> 5.5 lb/hr 2.5 kg/hr Peak Flow Rate‡ 10 lb/hr 4.5 kg/hr

#### Components

ASME Relief Valve Setting
Secondary RV Setting
Gas Use Connection
Fill Line Connection
Vent Connection

300 psig 20.7 bar
450 psig 31.0 bar
1/4 in 45° Flare
5/8 in Male 45° Flare
1/2 in OD Tubing

## Construction

Inner Vessel Material Stainless Steel
Outer Vessel Material Stainless Steel
Liquid Level Gauge
Differential Pressure

# **Your Local Representative**





Innovation. Experience. Performance. \*

Chart Inc. U.S.: 1-800-400-4683 Worldwide: 1-952-758-4484 www.chartbeverage.com

©2010 Chart Inc. P/N 12889441